

NEWPORT TOOL & FASTENER

"ROOF TILE FASTENER SPECIALISTS"

THE TYLE-TYE® TILE NAIL ES ICC-ES ESR-1411


DESCRIPTION

The Tyle-Tye® Tile Nail is a unique fastener used for clay and concrete roof tiles nailed to wood sheathing. The fasteners are approximately 10" long with a 1" nail. They are available with or without a wind lock nose hook. The Tyle-Tye® Tile Nail will automatically set the head lap and exposure of the tile.

SPECIFICATIONS

Tile Nail - Stainless Steel - 10" x .120 dia. / type 304 ASTM A 580-90 with 1" nail
Galvanized Steel - 10" x .120 dia. / ASTM A 641-82 with 1" nail
Brass - 10" x .135 dia. / ASTM B 134 with 1" nail
Packaged - 1000 pieces per box


Head Laps - 3", 4", or variable

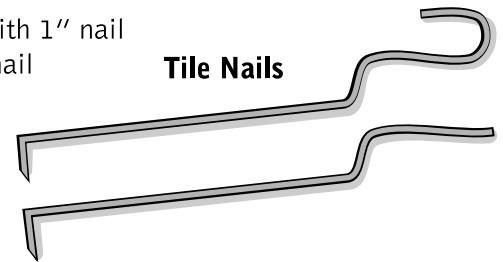

Tile Nails


APPLICATIONS

Wood - For installation to wood decks only. Insert the nail end through the nail hole of the tile, then nail the nail end into the deck approximately 6" above head of tile. If booster tiles are used with two piece cap and pan tile, fasten the booster tile and first course tile using a Tile Nail with Wind Lock Nose Hook.

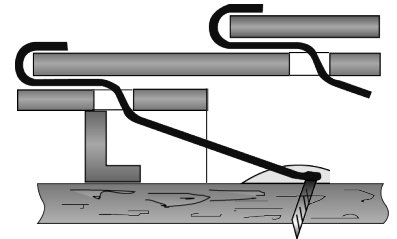

RECOMMENDATIONS

For High wind and high slope conditions, the use of Tyle-Tye® Tile Nails with Wind Lock Nose Hook and/or Hurricane Side Clips are recommended for the additional prevention of wind and seismic damage.



Hurricane
Side Clip



Wind Lock
Nose Hook

* Note* The specifications/recommendations described above are a guide. Please review local building codes and consult an architect or certified structural engineer for project specific requirements.

Newport Tool & Fastener Company, Inc., 2000 5th St., Norco, CA 92860
(800)645-7811 (951)739-6800 Fax (951)808-0034 www.newportfastener.com